


1. Must survive Vibration Mil-STD-202 MD 204G and Shock MIL-STD-202 MD213C
2. Hipot 500 VAC
3. DCR = (1-2) = 0.60 Max (4-5)=(5-6)=.10 max
5. Mark as shown, lead number can be on top
6. All material used in this construction must be greater than 180 C

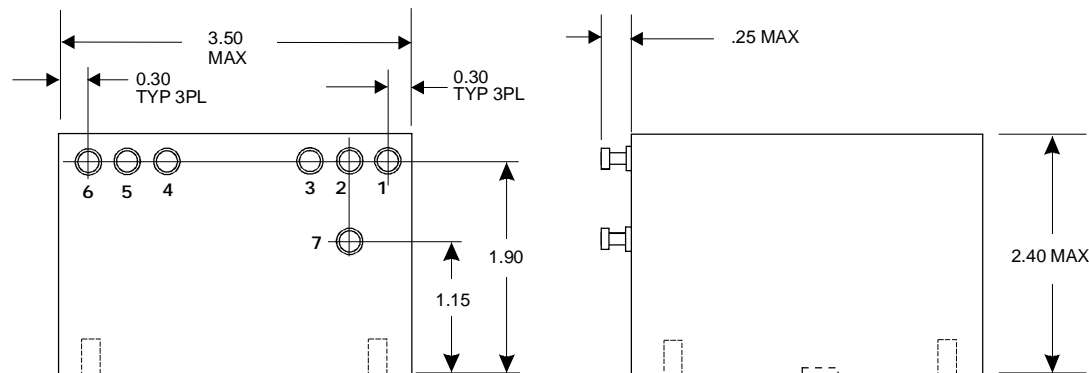

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION, AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE NOR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM RAYCO ELECTRONICS MFG. INC..

CASE: MIL-P-13949

EPOXI: High Temp 180C min

INSERT: (8-32 -.40MIN) SS

NEXT ASSY

DATE 4/23/04

RAYCO ELECTRONICS
GARDENA CA 90247

TOLERANCES
UNLESS OTHERWISE SPECIFIED
ARE IN INCHES AND AS BELOW

DWN MMP

DECIMAL

.X	.XX	.XXX
±0.1	±0.03	±0.010

 ANGLE = ± 5°

APP MPP

CAGE
04620

P/N
5T5623

REV

SCALE

UNIT WEIGHT

SH 1 OF 1

